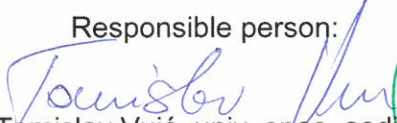



TEST REPORT AND ASSESSMENT OF PERFORMANCE BASED ON TESTING No. EN-72570/100/21-214/21

(based on sampling carried out by the manufacturer)

Client: SONITUS d.o.o., Tina Ujevića 26, HR-48000 Koprivnica
Offer: Offer No. 72570-0-0398/19 dated on 2019-05-28
Building product: absorber Sonitus Acoustics Quadsorber 4 PRO
Manufacturer: SONITUS d.o.o., Tina Ujevića 26, HR-48000 Koprivnica
Date of receipt of the sample: 2021-09-08
Laboratory sample No.: LGF 233/21
Place of testing: INSTITUT IGH, d.d., Materials and Structures Department, IGH Laboratory, Building Physics Laboratory, Janka Rakuše 1, HR-10000 Zagreb, Croatia
Tested property: Sound absorption
Decision No.: KLASA: UP/I-360-01/20-08/37, URBROJ: 531-04-2-1-2-21-10 dated on 2021-04-15

Responsible person:

Tomislav Vučić, univ. spec. aedif.

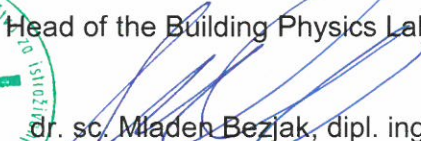

Head of the Building Physics Laboratory

dr. sc. Mladen Bezjak, dipl. ing. stroj.

Test report No: EN-72570/100/21-214/21

- Task:** Sound absorption testing of samples delivered by the manufacturer.
- Testing standard:** HRN EN ISO 354:2004 – Acoustics -- Measurement of sound absorption in a reverberation room (ISO 354:2003; EN ISO 354:2003)
- Evaluating standard:** HRN EN ISO 11654:1998 – Acoustics -- Sound absorbers for use in buildings – Rating of sound absorption (ISO 11654:1997; EN ISO 11654:1997)

Description of tests samples (information supplied by the client):


PRODUCT NAME : SONITUS ACOUSTICS QUADSORBER 4 PRO

DESCRIPTION : BRIGHTBAND ABSORBER

MATERIAL :

>Polyester foam 25kg / +-2kg m³, 4 kPa +- 0,6 kPa, fire retardant according to FMVSS302 <100mm/min
fire retardant according to FMVSS302 <100mm/min

DIMENSIONS : 600x600x40mm

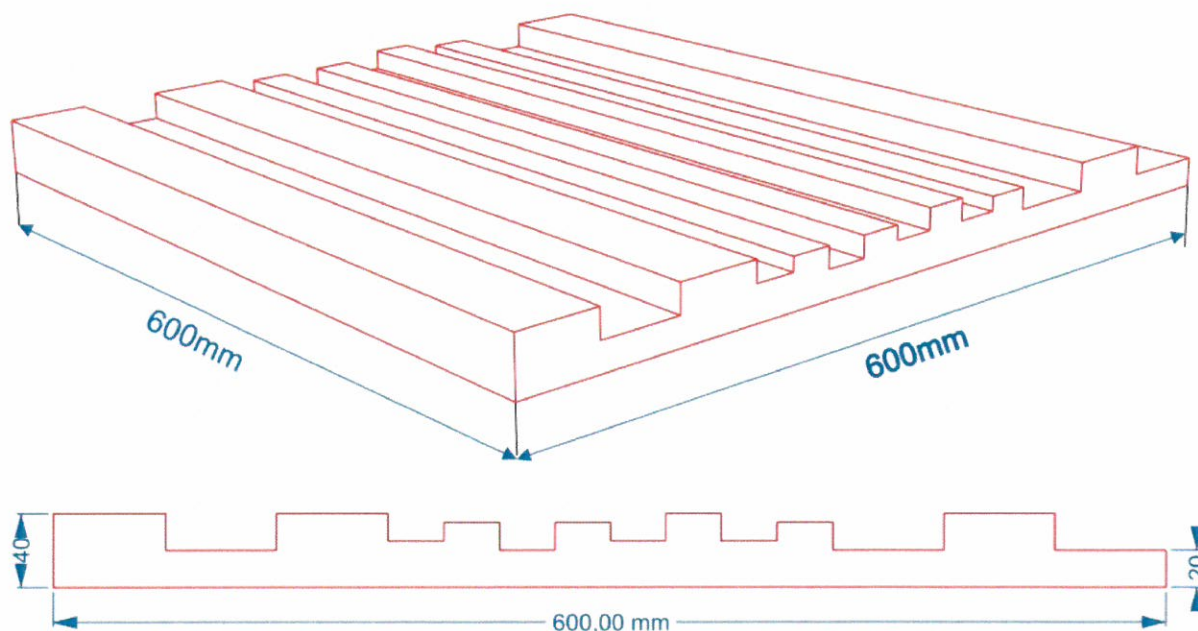

Absorber Sonitus Acoustics Quadsorber 4 PRO, nominal dimensions: 600 mm x 600 mm, thickness: 40 mm, base height 20 mm, were tested (photo 1 and 2).

Measured surface mass of the Sonitus Acoustics Quadsorber 4 PRO absorber: 0,73 kg/m².

Test report No: EN-72570/100/21-214/21



Photo 1

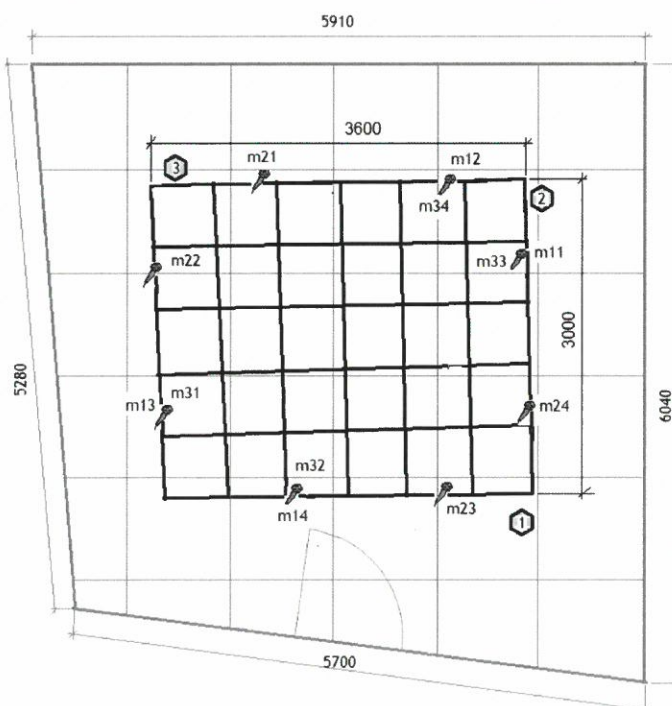


Photo 2

Installation method of test samples:

For measuring sound absorption of Sonitus Acoustics Quadsorber 4 PRO, 30 pieces of absorber, dimensions: 600 mm x 600 mm, were placed on the floor of the reverberation room and formed a surface of 10,80 m² (Sketch 1).

Lateral surfaces of the Sonitus Acoustics Quadsorber 4 PRO absorbers hadn't protected, so they were a part of the absorption surface (photo 3 and 4) too, creating additional 0,26 m².



Sketch 1

Test report No: EN-72570/100/21-214/21



Photo 3

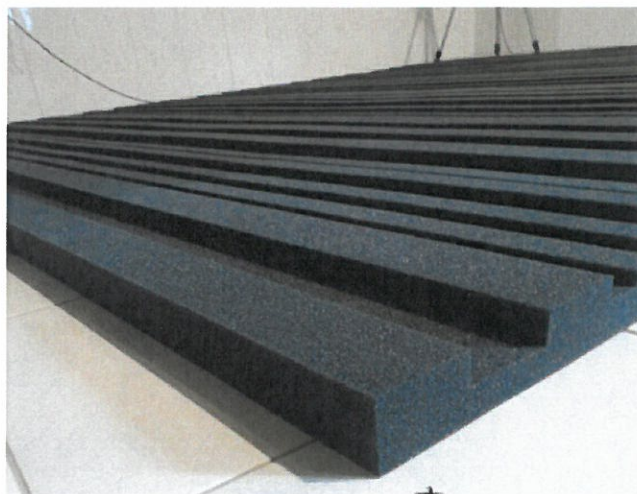


Photo 4

Description of a reverberation room:

- volume: 194,8 m³,
- area: floor 32,65 m², ceiling: 32,65 m², walls: 136,77 m²,
- diffusers: pieces 8, total area: 30,17 m².

Test conditions:

- number of microphone positions: 12 (m11... m34),
- number of loudspeaker positions: 3,
- number of averaging on individual position microphone/ loudspeaker: 3.

Measuring and testing equipment:

- hand-held analyzer, type 2270 (Dual Channel), Bruel & Kjaer, serial number: 2679276,
- sound pressure calibrator, type 4231, Bruel & Kjaer, serial number: 3023871,
- thermohygrometer, ROTRONIC, type Hygroclip S, laboratory mark 1680, serial number: 23535 011,
- condenser microphone, type 4189, Bruel & Kjaer, serial number: 2670475,
- preamplifier, type ZC 0026, Bruel & Kjaer, serial number: 2877,
- power amplifier, type 2716, Bruel & Kjaer, serial number: 2486522,
- sound source, type 4296, Bruel & Kjaer, serial number: 2485310,
- barometer, serial number: 225558, laboratory mark 1135.

Test results:

The sound absorption coefficient (α_s) and partical sound absorption coefficient (α_p) of tested samples as a function of frequency is shown in table and diagram. In presenting the results, the following symbols are used:

- f – centre frequency of the one-third-octave band (Hz),
- α_s – sound absorption coefficient,
- α_p – partical sound absorption coefficient (for each octave band),
- T_1 – reverberation time of the empty reverberation room (s),
- T_2 – reverberation time of the reverberation room with test samples (s),
- α_w – weighted sound absorption coefficient.



INSTITUT IGH, d.d.
Laboratorij za građevinsku fiziku
Building Physics Laboratory
Janka Rakuše 1, 10000 ZAGREB, CROATIA
Tel: +385 1/6125 111, Fax: +385 1/6125 100
www.igh.hr



Test report No: EN-72570/100/21-214/21

Results of sound absorption measurements of absorber Sonitus Acoustics Quadsorber 4 PRO

Client: SONITUS d.o.o., Tina Ujevića 26, HR-48000 Koprivnica
Manufacturer: SONITUS d.o.o., Tina Ujevića 26, HR-48000 Koprivnica
Building product: absorber Sonitus Acoustics Quadsorber 4 PRO
Laboratory sample No.: LGF 233/21
Measuring assembly made by: laboratory staff
Date of test: 2021-10-01
Area of test samples: $S = 11,06 \text{ m}^2$
Volume of the reverberation room: $V = 194,8 \text{ m}^3$

Climatic conditions in the empty reverberation room (2021-10-01):

- temperature 21,3 °C,
- relative air humidity 47,5 %,
- air pressure: 100,2 kPa,


Climatic conditions in the reverberation room with test samples (2021-10-01):

- temperature 21,0 °C
- relative air humidity 46,9 %
- air pressure: 100,3 kPa

Test report No: EN-72570/100/21-214/21

Frequency f (Hz)	Reverberation time of empty reverberation room T_1 (s)	Reverberation time of reverberation room with test samples T_2 (s)	Sound absorption coefficient α_s
100	15.85	12.17	0.05
125	11.98	8.92	0.08
160	11.93	8.34	0.10
200	11.16	6.79	0.16
250	9.55	5.66	0.20
315	9.33	4.77	0.29
400	8.93	4.09	0.38
500	9.37	3.62	0.48
630	8.88	2.97	0.64
800	8.26	2.64	0.73
1000	7.84	2.45	0.80
1250	7.22	2.35	0.81
1600	6.49	2.23	0.83
2000	5.83	2.09	0.87
2500	5.07	1.95	0.89
3150	4.16	1.8	0.89
4000	3.31	1.62	0.89
5000	2.60	1.43	0.88


The sound absorption coefficient:

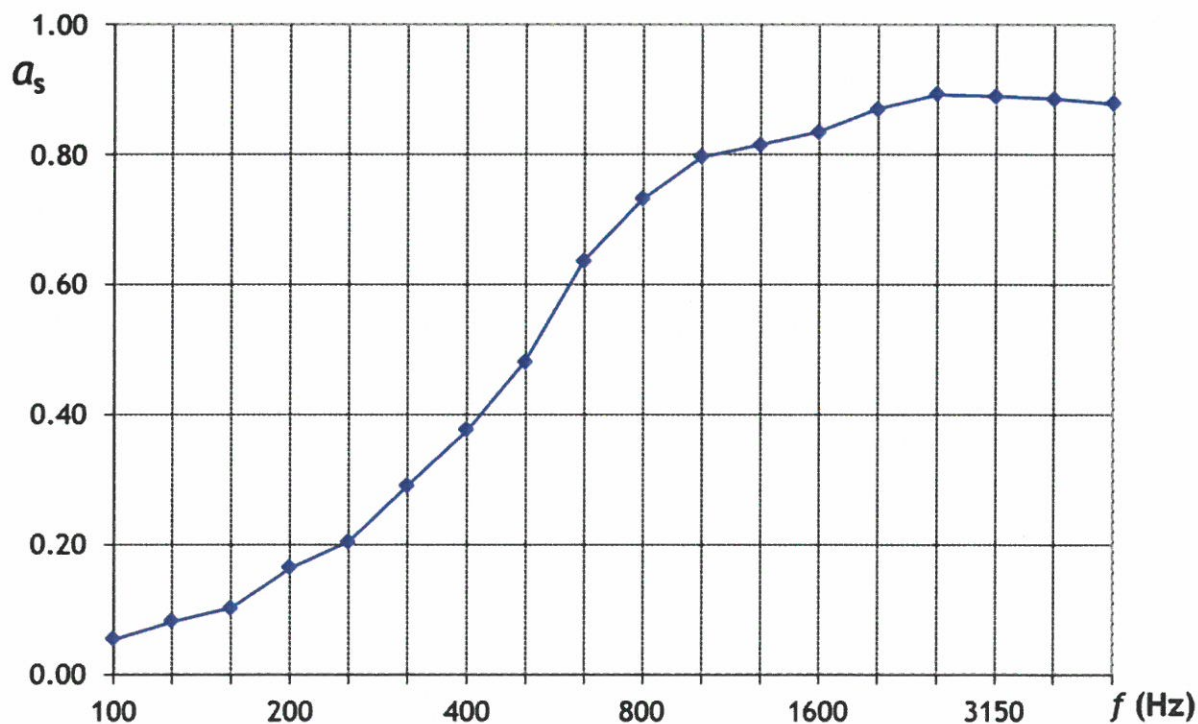

Test report No: EN-72570/100/21-214/21

Classification of the sound absorption measurement results of absorber Sonitus Acoustics Quadsorber 4 PRO, according to HRN EN ISO 11654: 1998

Frequency	Curve of shifted reference values	Practical sound absorption coefficient
f (Hz)		α_p
125		0.10
250	0.3	0.20
500	0.5	0.50
1000	0.5	0.80
2000	0.5	0.85
4000	0.4	0.90

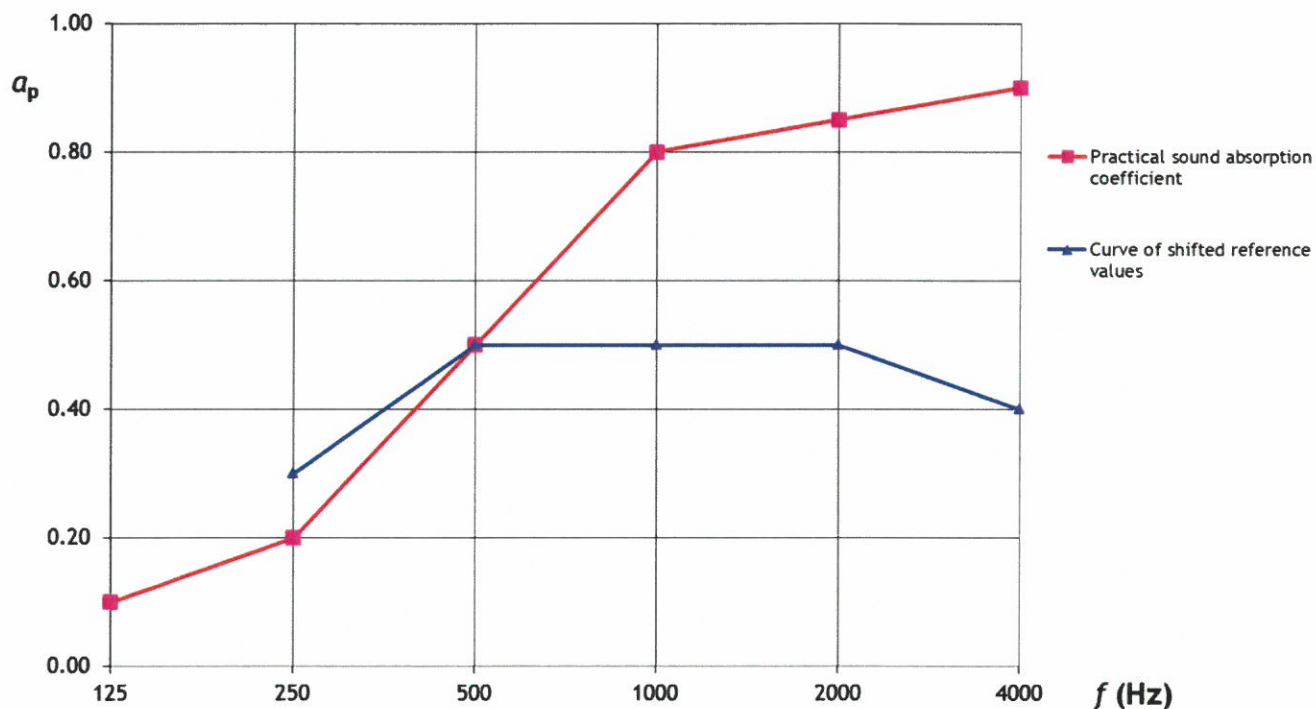

Absorber Sonitus Acoustics Quadsorber 4 PRO manufactured by SONITUS d.o.o., Tina Ujevića 26, HR-48000 Koprivnica	
Weighted sound absorption coefficient	Sound absorption class according to HRN EN ISO 11654:1998
$\alpha_w = 0,50(\text{MH})$	D